





PLT LED




Especificações | Specifications | Spécifications | Especificaciones



Dimensões | Dimensions | Dimensions | Dimensiones




Distribuição espectral | Spectral distribution | Distribution spectrale | Distribución espectral



4000K

Etiqueta energética | Energy label | Étiquette énergétique | Etiqueta energética

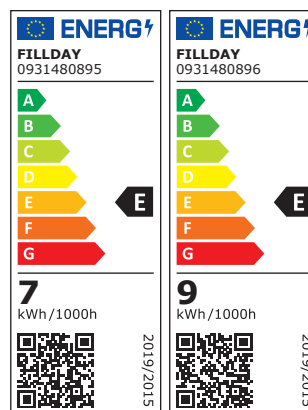

REF	COD	K	lm	VOLT (V)	FREQ. (Hz)	BASE	CRI (Ra)	LIFESPAN (h)	ANGLE (°)	REPLACE Watt	Qtd. Min.	Qtd. Cx.	CLASS
7W 0931480895	02.001.001.029.00015	4000	800	180-240	50/60	GX24D-2 2P	80	30.000	120	18	10	100	A ↑ E
9W 0931480896	02.001.001.029.00016	4000	1100	180-240	50/60	GX24D-3 2P	80	30.000	120	26	10	100	A ↑ E

Compatível com balastro ferromagnético (CCG) | Não usar com balastro eletrônico (ECG)

Compatible with ferromagnetic ballast (CCG) | Do not use with electronic ballast (ECG)

Compatible con balastro ferromagnético (CCG) | No usar con balastro electrónico (ECG)

Compatible avec ballast ferromagnétique (CCG) | Ne pas utiliser avec ballast électronique (ECG)

Imagem da lâmpada meramente ilustrativa