


SURFACE ROUND LED 3CCT



POTÊNCIA Power Puissance Potencia	12 / 18 / 24W
FLUXO LUMINOSO Luminous flux Flux lumineux Flujo luminoso	1000 / 1600 / 2400lm
Lm/W	80 - 100lm/W
TEMPERATURA DE COR Colour temperature Temperature de la couleur Temperatura del color	3CCT (3000 / 4200 / 6500K - CRI80)
VIDA ÚTIL LED LED lifetime Durée de vie de la LED Vida útil de LED	20000h(L70B50)
ÂNGULO Angle Angle Angulo	120°
IP	42
IK	04

ESPECIFICAÇÕES

Specifications | Spécifications | Especificaciones

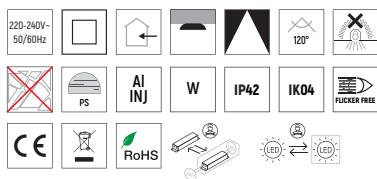

CLASSE ISOLAMENTO Isolation Class Classe d'isolation Clase de aislamiento	II
TENSÃO DE ALIMENTAÇÃO (VAC) Voltage Tension d'alimentation Tensión de alimentación	220-240 V~
FREQUÊNCIA Frequency Frequence Frecuencia	50/60Hz

ESPECIFICAÇÕES LED

LED Specifications | Spécifications de la LED | Especificaciones del LED



MATERIAL Material Matériel Material	PS e alumínio PS and aluminum PS et aluminium PS y aluminio
COR Colour Couleur Color	Branco White Blanc Blanco
MONTAGEM Mounting Montage Aplicación	Saliente Salient Saillie Salient
INSTALAÇÃO Installation Installation Instalación	Teto Ceiling Plofond Techo

OPCIONAL

Optional | Optionnel | Opcional




SURFACE ROUND LED 3CCT



DIMENSÕES

Dimensions | Dimensiões | Dimensiones



(D x A)
Ø170 x 36 - 12W
Ø225 x 36 - 18W
Ø300 x 36 - 24W

(mm)



REF	COD	W
2820750056	01.002.001.001.00760	12
2820750057	01.002.001.001.00761	18
2820750058	01.002.001.001.00762	24