


ROVER



	REF	COD	W
■	1340270000	03.002.001.078.00001	10
	1340270001	03.002.001.078.00002	30
	1340270002	03.002.001.078.00003	60

ESPECIFICAÇÕES

Specifications | Spécifications | Especificaciones

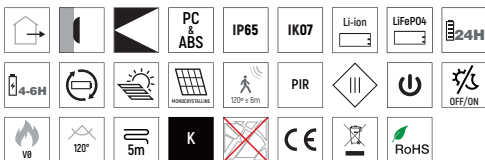


ESPECIFICAÇÕES LED

LED Specifications | Spécifications de la LED | Especificaciones del LED



DIMENSÕES

Dimensions | Dimensions | Dimensiones



A
10W - 152.7 x 146.8 x 31.2mm
30W - 199.7 x 190.9 x 49mm
60W - 263.2 x 245 x 54.5mm

B
10W - 202.1 x 220.9 x 24mm
30W - 374.3 x 255.2 x 21.5mm
60W - 354.6 x 518.7 x 35mm

POTÊNCIA Power Puissance Potencia	10 / 30 / 60W
FLUXO LUMINOSO Luminous flux Flux lumineux Flujo luminoso	1500 / 4800 / 9600lm
Lm/W	150 / 160lm/W
TEMPERATURA DE COR Colour temperature Température de couleur Temperatura del color	2CCT (3000 / 4000K)
ÂNGULO Angle Angle Angulo	120°
IP	65
IK	07
CLASSE ISOLAMENTO Isolation Class Classe d'isolation Clase de aislamiento	III
PAINEL SOLAR MONOCRISTALINO Monocrystalline solar panel Panneau solaire monocristallin Panel solar monocristalino	6Vdc 4,5W / 10Vdc 10,5W / 20Vdc 22W
BATERIA Battery Batterie Batería	Li-ion 3,7V 3600mAh 13,32Wh / LiFePO4 6,4V 6000mAh 38,4Wh / LiFePO4 12,8V 6000mAh 76,8Wh
TEMPO DE CARREGAMENTO Charging time Temps de charge Tiempo de carga	4-6h
TEMPO DE FUNCIONAMENTO Working time Temps de fonctionnement Tiempo de funcionamiento	24h
TEMPERATURA DE FUNCIONAMENTO Working temperature Température de service Temperatura de funcionamiento	-20°C +60°C
TEMPERATURA DE ARMAZENAMENTO Storage temperature Température de stockage Temperatura de almacenamiento	0°C +45°C

ROVER



MATERIAL

Material | Matériel | Material

Polícarbonato e ABS
Polycarbonate and ABS
Polycarbonate et ABS
Polícarbonato y ABS

COR

Colour | Couleur | Color

Preto
Black | Noir | Negro

MONTAGEM

Mounting | Montage | Aplicación

Saliente
Salient | Saillie | Salient

INSTALAÇÃO

Installation | Installation | Instalación

Parede
Wall | Mural | Pared

ALTURA DE INSTALAÇÃO

Installation height | Hauteur d'installation | Altura de instalación

2-4/5/6m

SENSOR

DISTANCIA DE DETECÇÃO

Detection distance | Distance de détection | Distancia de detección

MAX 6/8/8m

ÂNGULO DE DETECÇÃO

Angle of detection | Angle de détection | Angulo de detección

120°